

COUNTY-W COUNTING SCALES

System: strain gauge Operating temperature: 0 +40°C
 Display: 3 groups of 14mm backlighted LCDs RS232C serial output option
 Main: 110-120-220-240Vac 50/60Hz Optional printer interface
 Battery: Internal rechargeable

basic

8301.215 **750g**
8301.217 **3Kg**

Display resolution: 1/15,000
 Internal resolution: 1/300,000



high resolution

8301.190 **3Kg**
8301.191 **6Kg**
8301.192 **15Kg**
8301.193 **30Kg**

Display resolution: 1/30,000
 Internal resolution: 1/480,000



professional

8301.200 **6Kg**

Display resolution: 1/30,000
 Internal resolution: 1/600,000

- Auto-Calibration: software
- 10 unit weight memory cells

MODEL	CAPACITY	DISPLAY RESOLUTION	INTERNAL RESOLUTION	MINIMUM UNIT WEIGHT	PLATTER SIZE
8301.215	300g	0,02g	0,005g	0,04g	Ø 150 mm
8301.217	750g	0,05g	0,01g	0,08g	235 x 178 mm
	1500g	0,1g	0,02g	0,2g	
8301.190	3000g	0,1g	0,01g	0,1g	334 x 245 mm
	6000g	0,2g	0,02g	0,2g	334 x 245 mm
8301.192	15000g	0,5g	0,05g	0,5g	334 x 245 mm
	30000g	1g	0,1g	1g	334 x 245 mm
8301.200	6000g	0,2g	0,01g	0,1g	320 x 240 mm

8301.197 RS232C serial output option (to be installed before shipment),
8301.198 Optional printer interface (to be installed before shipment),
8301.195 RS232C serial output option (to be installed before shipment),
8301.196 Optional printer interface (to be installed before shipment),
8301.202 RS232C serial output option (to be installed before shipment),
8301.203 Optional printer interface (to be installed before shipment),

for models **8301.215/217**
 for models **8301.215/217**
 for models **8301.190/191/192/193**
 for models **8301.190/191/193/193**
 for models **8301.200**
 for models **8301.200**

portable

8301.236
8301.237


1Kg
4Kg

Display resolution 8301.236: 1/5.000
Display resolution 8301.237: 1/4.000



Precision Balance

Precision electronic balance with anti-dust and anti-wind covers for to minimise the mistakes caused by the environment. Normal weighting, piece counting, and percentage counting modes.

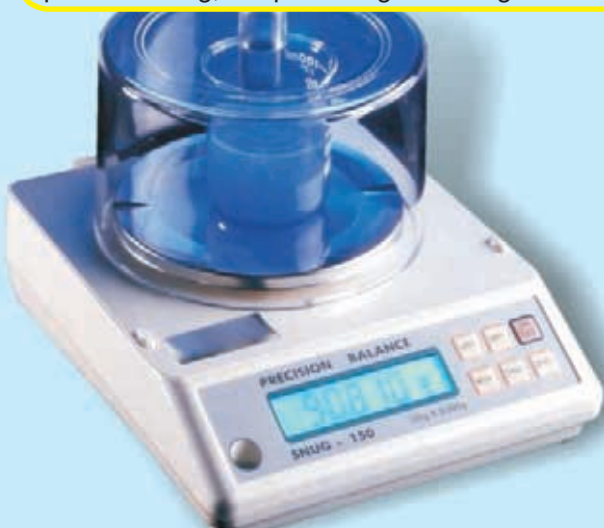

Weighing units: 13 selectable (Gram, Carat, Ounce, etc.)
Pan size: Ø 125mm (4.9 inches)
Scale dimensions: 220 x 180 x 160(H)mm
Measuring system: Strain Gauge Load Cell
Display: liquid crystal 14mm, with backlight
Set up: can be configured by the customer
Display resolution: 1 / 30,000
Internal resolution: 1 / 150,000
Interface: Uni-direction RS232C
Power: AC/DC adaptor operated by 220 or 110Vac (specify in the order) with 4 alkaline batteries size C(UM-2), 100 hours operation

Model	Capacity	Display resolution	Internal resolution
8301.230	150g	0.005g	0.001g
8301.231	300g	0.01g	0.002g
8301.232	600g	0.02g	0.004g

Measuring system: strain gauge
Pan size: 510 x 420mm (16 x 20inches)
Total height: 1m
Calibration: by software
Display: liquid crystal 14mm, with backlight
Set up: can be configured by the customer
Power: 110-120-220-240Vac 50/60Hz
Internal rechargeable battery: 120 hours operation

Capacity	Display resolution	Internal resolution
60Kg	4g	0.8g
150Kg	10g	2g

8301.225 Platform counting scale 60 / 150Kgs
8301.221 Optional RS232C interface

Platform Counting Scale

Accurate and efficient industrial model, with two capacities selectable by software 60 and 150Kgs.



THERMAL LABEL PRINTER

8301.223 THERMO-ADHESIVE LABEL PRINTER, can be fitted to COUNTY-W counters for the printing of the following data:
total weight, unit weight
total quantity.

WARNING: optional printer interface must be added to the scale.

AC Adaptor 110-230Vac and Data Cable included.

8301.091 THERMO-ADHESIVE ROLL PAPER 30m length. It is possible to obtain about 500 labels.

