


## SUPERFORM/IC-F

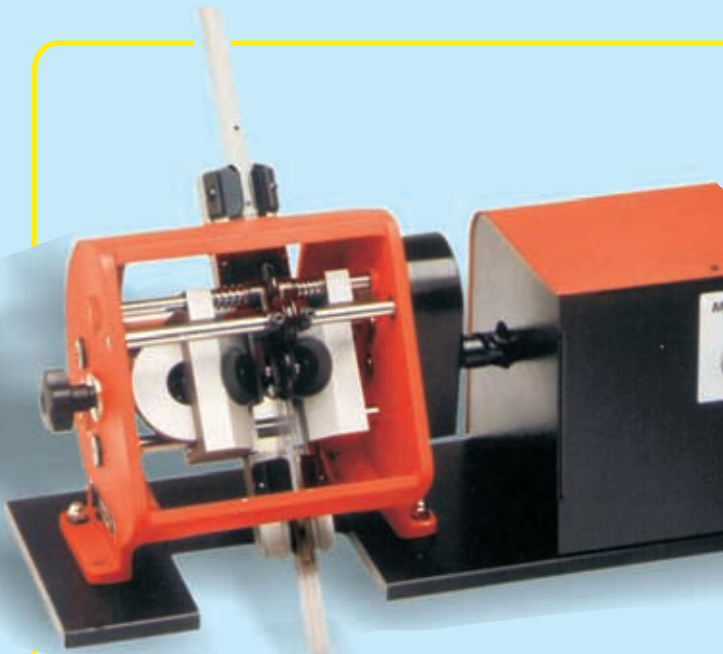

The Superform/IC-F with its rotary mechanical system aligns and brings IC leads to standard pitch, so that these can be easily and quickly inserted into the PCB.

Every pitch of IC can be aligned, by adjusting the mechanical roller system with the main external knob.

The machine works automatically by drawing the components to be preformed from the stick, placed on the top of the machine and by placing the IC, after the preforming operation into a second stick placed on the bottom.

Dependant on the components being processed, the correct top and bottom stick holders are fitted to the machine.

The 0.3" (7,6mm) and 0.6" (15,24mm) pitch stick holders are supplied with machine, other sizes are available on request.

**7915.026** Manual SUPERFORM/IC-F supplied with .3" and .6" top /bottom stick holders

**7915.035** 220V Motor Unit for SUPERFORM/IC-F

**7915.036** 110V Motor Unit for SUPERFORM/IC-F

**600.023ICF** Foot switch for 7915.035 motor

**770.020** Top Stick Holder 0.3" pitch (7.62mm)

**770.061** Bottom Stick Holder 0.3" pitch (7.62mm)

**770.057** Top Stick Holder 0.4" pitch (10.16mm)

**770.062** Bottom Stick Holder 0.4" pitch (10.16mm)

**770.058** Top Stick Holder 0.6" pitch (15.24mm)

**770.063** Bottom Stick Holder 0.6" pitch (15.24mm)

**770.059** Top Stick Holder 0.75" pitch (19.05mm)

**770.064** Bottom Stick Holder 0.75" pitch (19.05mm)

**770.060** Top Stick Holder 0.9" pitch (22.86mm)

**770.065** Bottom Stick Holder 0.9" pitch (22.86mm)

## SUPER CUT/IC-F


Tube to tube motorised machine for cutting the In-Line and Dual-In-Line component's leads.

This model can process several types of radial components, such as relays, transistors and integrated circuits.

The machine feeds, drives and cut the components holding them by the body.

The two cutting wheels are located under the driving belts.

The machine shall be equipped in the middle, by the suitable "GUIDE/STICK-HOLDER" group, that drives the components and operate as cutting contrast for the two cutting wheels.



**7915.028** SUPER CUT/IC-F motorized machine without the group " Guide / Stick-Holders" supply 220VAC

**7915.029** SUPER CUT/IC-F motorized machine without the group " Guide / Stick-Holders" supply 110VAC

**760.500** Stick Holder P = 0.3" (7,62mm)

**760.600** Stick Holder P = 0.4" (10,16mm)

**760.700** Stick Holder P = 0.6" (15,24mm)

**760.800** Stick Holder P = 0.75" (19,05mm)

**760.900** Stick Holder P = 0.9" (22,86mm)

